



NeatPleat RPC Rigid Minipleat Carbon Cell

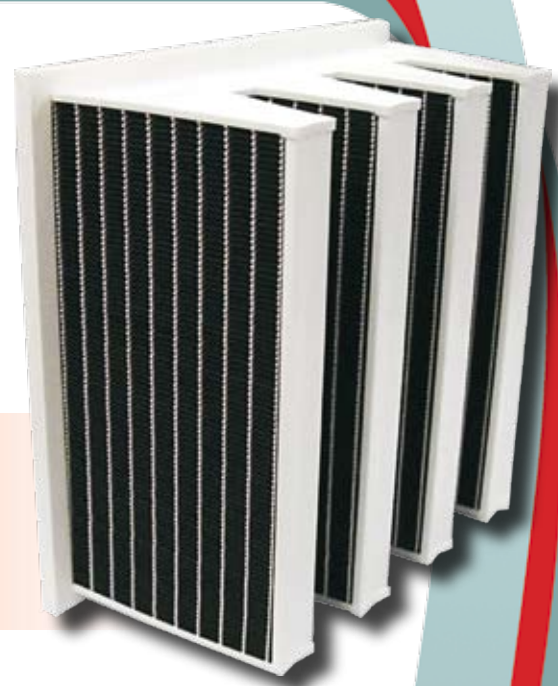

Typical Applications

Fine filter efficiency combined with a layer of highly activated carbon powder combines to give effective filtration and de-odourisation for offices, airports, workshops and any other public place.

Filter Efficiency to BS EN 779			F6
Rating to ASHRAE 52.2 Test Standard			Merv 12
Model Number	Rated Airflow	Size (mm)	Initial Pressure Drop
RPC-2412	3400m ³ /hr	592 x 592 x 292	120Pa
RPC-2012	2800m ³ /hr	492 x 592 x 292	120Pa
RPC-1212	1700m ³ /hr	289 x 592 x 292	120Pa
Final Recommended Pressure Drop			450Pa

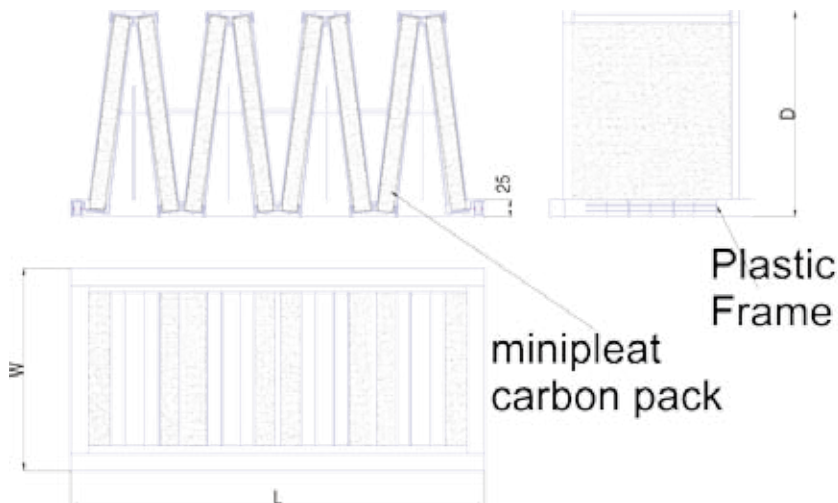

EMS 81914
BS EN ISO 14001:2004



FM 29257
BS EN ISO 9001:2000

Jasun Filtration Plc
Riverside House, Parrett Way
Bridgwater, Somerset.
TA6 5LB
United Kingdom

Tel.: +44 (0) 1278 452277
Fax: +44 (0) 1278 450873
info@jfilters.com
<http://www.jfilters.com>