

Neatpleat **65** Minipleat Panel Filter

General Description

These filters are manufactured from the most recent generation of low pressure drop medium efficiency media's available on the market.

The are used in any application where a high degree of cleanliness is required.

F6 grade filters are found often in air-conditioning to offices, theatres, computer rooms and spray booths.

Construction

Highly durable polypropylene filter media is mini-pleated to form a rigid filter pack, which is encased in either a plastic or galvanised frame. (Galvanised is standard)

Features

- F6 Grade to EN779
- Durable
- Compact
- Hydrophobic
- Anti-Microbial
- FREE gasket - simply specify side, face or back.



Filter Efficiency to BS EN 779		F6
Rating to ASHRAE 52.2 Test Standard		Merv 11
Filter Thickness	Rated Airflow	Initial Pressure Drop
25mm	1.25m/sec	59Pa
45mm	2.0m/sec	59Pa
95mm	2.5m/sec	59Pa
Maximum Recommended Pressure Drop		450Pa



Jasun Filtration Plc
Riverside House, Parrett Way
Bridgwater, Somerset.
TA6 5LB
United Kingdom

Tel.: +44 (0) 1278 452277
Fax: +44 (0) 1278 450873
info@jfilters.com
<http://www.jfilters.com>

neatpleat65 Panel Filter


STANDARD SIZES

No.	Description	Filter Grade	Height (mm)	Width (mm)	Depth (mm)	Capacity m ³ /hr.	Pressure Drop	Media Area
NP611212	Neatpleat 65 12x12x1	F6	292	292	25	384	65	0.92
NP611224	Neatpleat 65 12x24x1	F6	594	287	25	767	65	1.90
NP611620	Neatpleat 65 16x20x1	F6	394	495	25	878	65	2.17
NP611625	Neatpleat 65 16x25x1	F6	394	622	25	1103	65	2.73
NP612020	Neatpleat 65 20x20x1	F6	495	495	25	1103	65	2.73
NP612024	Neatpleat 65 20x24x1	F6	594	495	25	1323	65	3.24
NP612025	Neatpleat 65 20x25x1	F6	495	622	25	1386	65	3.44
NP612424	Neatpleat 65 24x24x1	F6	594	594	25	1588	65	3.91
NP621212	Neatpleat 65 12x12x2	F6	292	292	45	614	65	1.22
NP621224	Neatpleat 65 12x24x2	F6	594	287	45	1227	65	2.53
NP621620	Neatpleat 65 16x20x2	F6	394	495	45	1404	65	2.89
NP621625	Neatpleat 65 16x25x2	F6	394	622	45	1764	65	3.63
NP622020	Neatpleat 65 20x20x2	F6	495	495	45	1764	65	3.64
NP622024	Neatpleat 65 20x24x2	F6	594	495	45	2117	65	4.31
NP622025	Neatpleat 65 20x25x2	F6	495	622	45	2217	65	4.58
NP622424	Neatpleat 65 24x24x2	F6	594	594	45	2540	65	5.21
NP641212	Neatpleat 65 12x12x4	F6	292	292	95	767	70	2.35
NP641224	Neatpleat 65 12x24x4	F6	594	287	95	1534	70	4.98
NP641620	Neatpleat 65 16x20x4	F6	394	495	95	1755	70	5.56
NP641625	Neatpleat 65 16x25x4	F6	394	622	95	2206	70	6.99
NP642020	Neatpleat 65 20x20x4	F6	495	495	95	2205	70	7.01
NP642024	Neatpleat 65 20x24x4	F6	594	495	95	2646	70	8.29
NP642025	Neatpleat 65 20x25x4	F6	495	622	95	2771	70	8.80
NP642424	Neatpleat 65 24x24x4	F6	594	594	95	3176	70	10.02

Neatpleat panels are also available in grades F7, F8 and F9.

They can also be made in a plastic case with or without header frame.

Non Standard sized filters can be made to customers specification

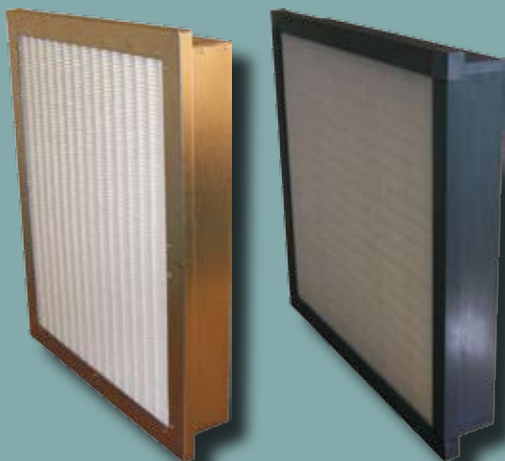

neatpleat H

MINIPLEAT FILTERS WITH HEADERS ALSO AVAILABLE IN EITHER METAL OR PLASTIC CASES.